Brought to you by Pro Gear & Transmission.

For parts or service call:

877-776-4600 407-872-1901



www.globaldifferentialsupply.com

906 W. Gore St. Orlando, FL 32805 parts@eprogear.com




an *ArvinMeritor* brand

Publication TP-03167

DriveTrain Plus™ by ArvinMeritor Product Identification Guide

Issued 03-04

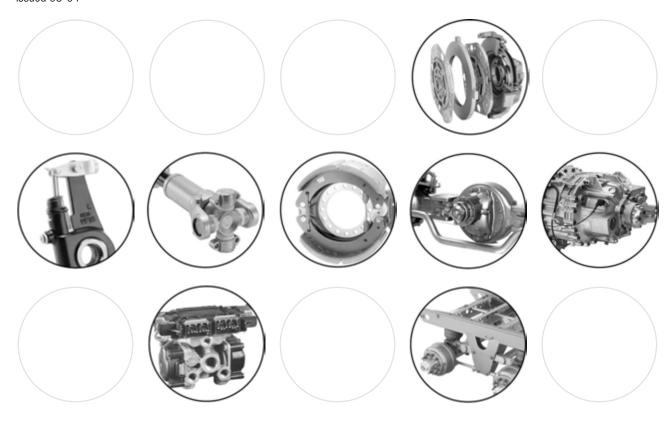

Overview

This publication provides identification information for Meritor, Meritor WABCO and Gabriel products. Product pictures and drawings, identification tag locations and model nomenclatures are provided.

How to Obtain Maintenance and Service Information

On the Web

Visit the DriveTrain Plus[™] by ArvinMeritor Tech Library at drivetrainplus.com to easily access product and service information. The Library also offers an interactive and printable Literature Order Form.

ArvinMeritor's Customer Service Center

Call ArvinMeritor's Customer Service Center at 800-535-5560.

Technical Electronic Library on CD

The DriveTrain Plus™ by ArvinMeritor Technical Electronic Library on CD contains product and service information for most Meritor and Meritor WABCO products. The cost is \$20. Specify TP-9853.

Contents

Section 1: Brakes pg. **1**

Automatic Slack Adjusters

Identification

- Four-Piston Quadraulic™ Disc Brake Caliper
- 3 Cam Brakes Identification
- 4 Cam Brakes
- 5 Model Nomenclature
- 6 Air Disc Brakes Model Nomenclature
- 7 Wedge Brakes Identification Model Nomenclature

Section 2: Clutches 8

Identification

- 9 Model Nomenclature
- 10 **Section 3: Drivelines**

Identification

Yoke Identification

Section 4: Front Axles 12

Front Non-Drive Steer Axles

- Identification
- Model Nomenclature 13
- Front Drive Steer Axles 14 Identification

Model Nomenclature

- 15 Model Nomenclature
- 16 Model Nomenclature

Section 5: Rear Axles 17

Single, Tandem and Tridem Rear Drive Axles Identification

- 18 Model Nomenclature
- 19 Model Nomenclature

Section 6: Bus and Coach Axles 20

Bus and Coach Non-Drive Axles Identification

- 21 Bus and Coach Drive Axles
 - Identification
 - Model Nomenclature
- 22 Model Nomenclature

23 Section 7: Trailer Air Suspension Systems

RideStar™ RHP

Identification

Model Nomenclature

- 24 RideStar™ RFS Series
 - Identification
- 25 RideStar™ RFS Series

Model Nomenclature

Section 8: Trailer Axles pg. **26**

Identification

Model Nomenclature 27

Section 9: Transmissions 28

FreedomLine® Identification

Model Nomenclature

29 Platform "G"

Identification

Model Nomenclature

30 Section 10: Transfer Cases

Identification

31 Model Nomenclature

Section 11: Meritor WABCO Components

Enhanced Easy-Stop™ Trailer ABS Identification

External Modulator Valve

Sensor with Molded Socket

33

In-Line Filter Valve

PLC DataMaster™ Trailer Data Extraction Module

Reverse Detection Module

Hydraulic Anti-Lock Braking Systems (ABS)

Identification 34

Modulator Assembly

Sensor with Molded Socket

Pneumatic ABS for Trucks, Tractors and Buses

Identification

35 ABS Valve Package — Rear Axle ABS/ATC Valve Package — Rear Axle

ABS Valve Package — Front Axle

ABS Modulator Valve

36 Automatic Traction Control Valve

Straight Sensor

Right Angle (90°) Sensor

Air Dryers

Identification

- 37 Air Compressors
- Air Brake System Valves 38
- 39 Single or Dual Circuit Foot Valve and Pedal Hand-Operated Valves
- Leveling Valves 40

Section 12: Gabriel Shocks 41

Identification

Automatic Slack Adjusters




Identification

The part number is located on the side of the slack adjuster.


Meritor uses either black, red, yellow, green or blue to color-code an automatic slack adjuster's internal piston actuator piston according to brake type and air chamber size.

Meritor uses a mylar tag on the body of the current-design slack adjuster to identify the color of the internal actuator piston. A color-coded tie wrap was used on previous-design slack adjusters.

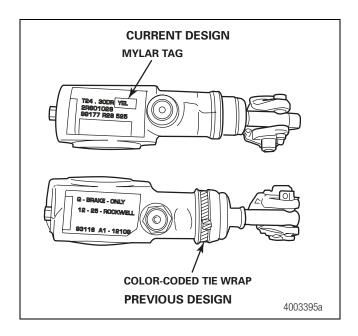

1 Brakes

Four-Piston Quadraulic™ Disc Brake Caliper

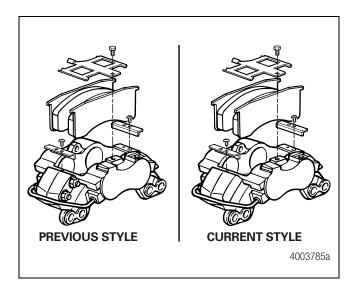

Current Style

Metric caliper bolts

Caliper housing halves held together by bolts in blind holes in the bridge area.

Integral piston/heat shield

Phenolic piston

Previous Style

SAE caliper bolts

Caliper housing halves held together by bolts and nuts in the bridge area.


Separate piston and heat shield

Metal piston

An assembly number is located on the side of the four-piston ${\tt Quadraulic^{\sf TM}}$ disc brake caliper.



Cam Brakes

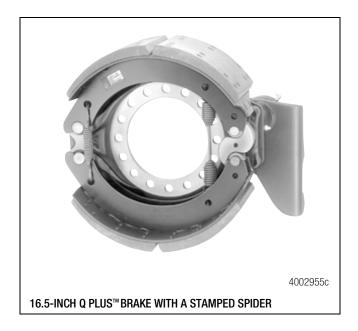

Identification


A model number tag for the brake assembly is located on the camshaft tube. An example of a part number for a 16.5 Q Plus™ brake is QP1 1657 1234X.


For bus and coach, the brakes are identified by a three-letter code on the axle identification plate.

In addition to the model number tag on the cam tube, a brake shoe label is attached to the brake shoe web. This label provides information on brake type, lining material and service parts replacement number.

The brake shoe lining also contains identification. The information that exists on the edge code of the lining is listed in the following order.

- Meritor stamped logo
- Lining mix designation
- Friction code
- Friction Material Standards Institute (FMSI) number, four to eight spaces
- Block type
- Meritor part number, last four digits
- Word drawing engineering change letter
- Julian date, four or five characters

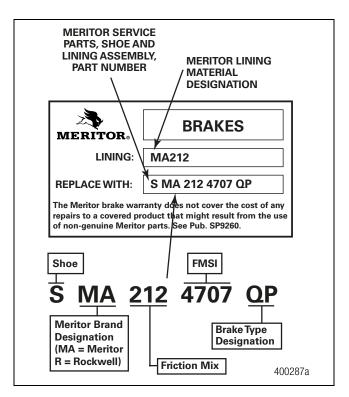

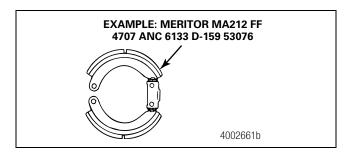

Identifying Q Plus™ LX500 and MX500 Brakes


NOTE: Do not remove the identification tag from the camshaft bracket during the extended maintenance period.

You can identify Q $Plus^{TM}$ LX500 and MX500 cam brakes by checking the identification tags affixed to the brake.


- A brake shoe tag identifies the brake as Q Plus™.
- An additional identification tag imprinted with "SEE MERITOR MAINTENANCE MANUAL MM-96173 FOR LUBE INFO," which is affixed to the brake chamber bracket over the top of the plugged grease hole, identifies the brake as a Q Plus™ LX500 or MX500 brake.
- 3. Q Plus™ LX500 and MX500 brakes and Meritor automatic slack adjusters do not have grease fittings.

Cam Brakes


Q Plus™ Components




4000323a



4000325a




4000327a



4000329a

Camshafts	Shoes	Return Springs
Q Plus™	Q Plus™	Heavy-duty (blue)
Q Plus™	Q Series	Standard
Q Series	Q Series	Standard


Q Series Components




TIP TO TIP = 4.22" PART NUMBER LOCATED HERE 1.378 DIA.

16.5" Q CAMSHAFT (1.5" DIA.-10 OR 28 SPLINES)


4000326a

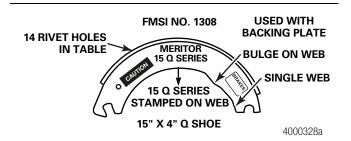



4000330a

Cam Brakes

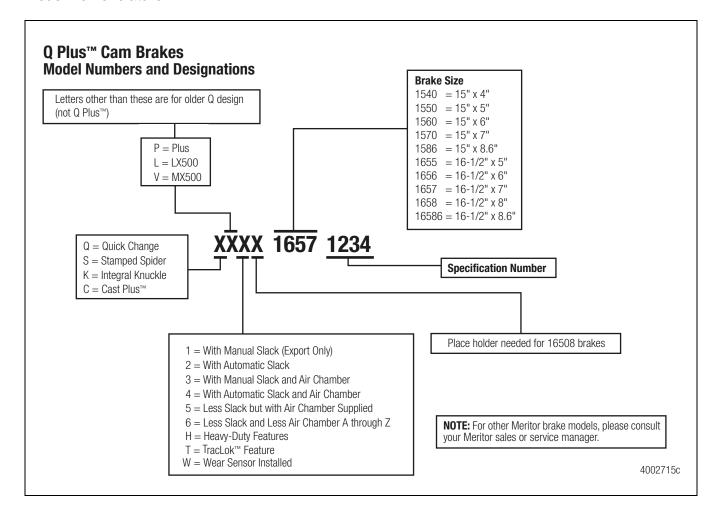


Air Disc Brakes





Meritor air disc brakes are identified by a model number tag attached to the grease fitting on the brake caliper assembly. An example of a part number for a Meritor air disc brake is ADB-1560-1.

DiscPlus^M air disc brakes are identified by a model number tag attached to the top surface of the caliper. An example of a part number for a DiscPlus^M air disc brake is DX 195 1234.


To identify a DXP 195 air release and hydraulic release parking disc brake, refer to the tag located on the chamber bracket.

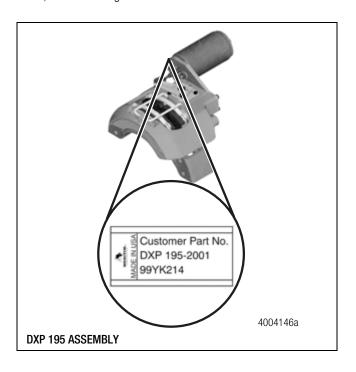

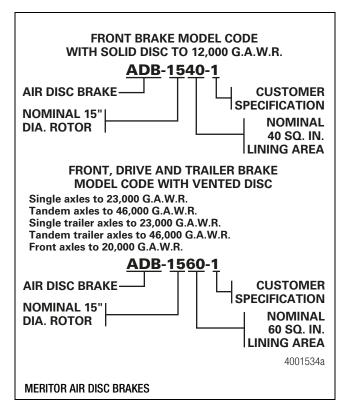



Wedge Brakes

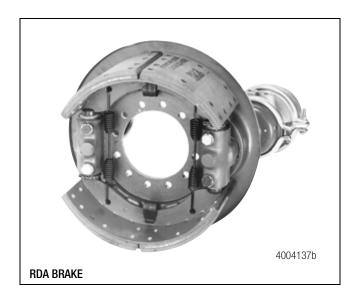



Identification


Wedge brakes are identified by a model number tag that is typically attached to the camshaft tube or dust shield of the brake assembly. An example of a part number for a wedge brake is RSA 1540 1234.


In addition to the model number tag on the cam tube, a brake shoe label is attached to the brake shoe web. This label provides information on the brake type, lining material and service parts replacement number.

For bus and coach, the brakes can be identified by a code on the axle identification plate.

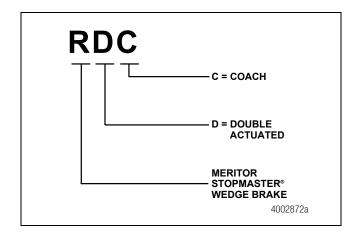





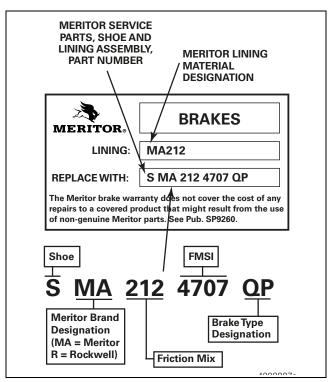

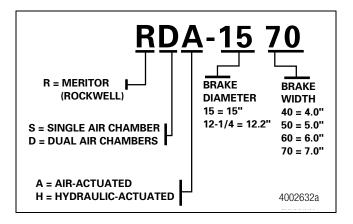


2 Clutches

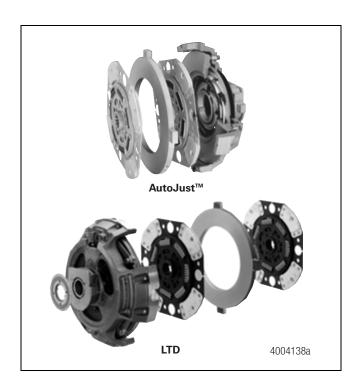


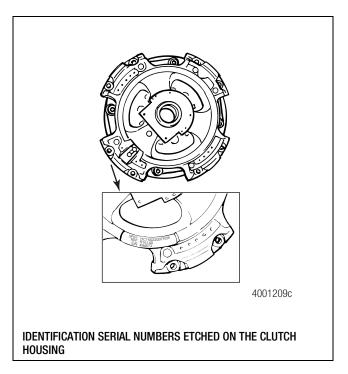



Identification

To identify a clutch, refer to the identification and serial numbers located on the front of the clutch cover. Refer to these numbers when you replace parts.

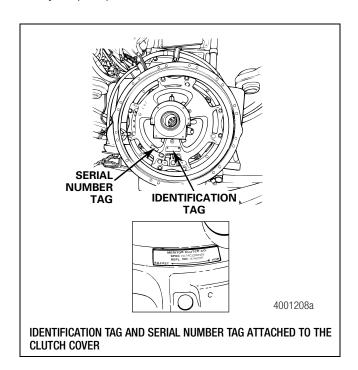

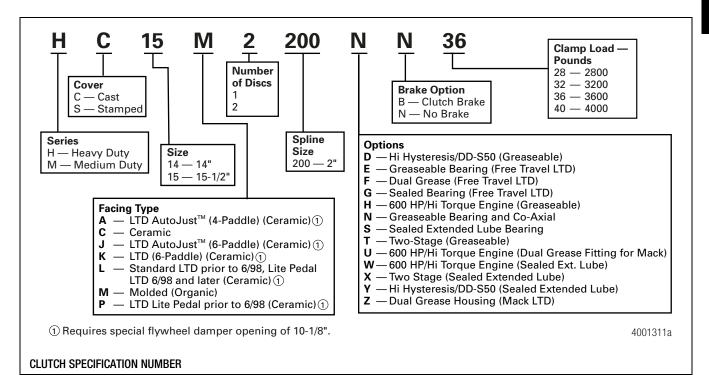

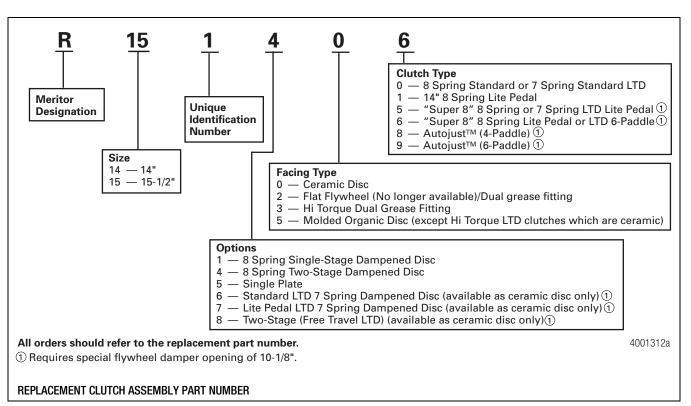

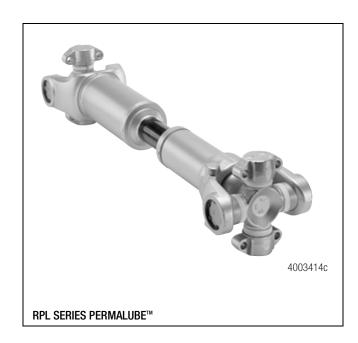

Identification

Meritor driveline components are identified by the following markings on the component.

- Logo stamped on the part
- Balance bosses
- Forging part number which identifies the driveline series


Meritor Driveline Series

16N	58WB
17N	62N
176N	72N
18N	82N
25W*	85WB
20W*	92N

* RPL25 and RPL20 do not follow the above convention and utilize their own unique numbering system.

Yoke Identification


Round Bearing



Χ	Υ	Z		
Across Earwork	Between Earwork	Bearing Diameter	Series	Туре
	1.44"	.97"	L6N	Inside Snap Ring
2.19"		.94"	10N	Outside Snap Ring
	2.38"	1.06"	131N	Inside Snap Ring
3.47"		1.06"	131N	Outside Snap Ring
	2.56"	1.19"	135N	Inside Snap Ring
3.88"		1.19"	135N	Outside Snap Ring
	3.13"	1.19"	141N	Inside Snap Ring
4.44"		1.19"	141N	Outside Snap Ring
	3.13"	1.38"	148N	Thrust Plate
4.44"		1.38"	148N	Thrust Plate
4.19"		1.38"	148N	Thrust Plate
5.25"		1.38"	155N	Thrust Plate
4.97"		1.38"	155N	Thrust Plate
5.31"		1.88"	16N	Cover Plate
6.09"		1.94"	17N	Cover Plate
7.00"		1.94"	176N	Cover Plate
7.55"		1.94"	18N	Cover Plate
5.19"		1.63"	750N	Outside Snap Ring
6.06"		1.94"	850N	Outside Snap Ring
7.89"		2.50"	950N	Outside Snap Ring
7.00"		2.06"	20RPL	Wing/Outside Snap Ring
8.33"		2.06"	25RPL	Wing/Outside Snap Ring


Identification

U-Bolt and Strap and Bolt



X	Z	
Between Lugs	Bearing Diameter	Series
3.22"	1.06"	131N
3.63"	1.06"	133N
3.63"	1.19"	135N
4.19"	1.19"	141N
4.19"	1.38"	148N
4.97"	1.38"	155N
5.31"	1.88"	16N
6.19"	1.94"	17N
7.09"	1.94"	176N
7.63"	1.94"	18N

RPL Driveline



X	
Between Lugs	Series
7.06"	20WYS
8.38"	25WYS


Wing Bearing



X	Υ	
Swing Diameter	Pilot Diameter	Series
5.63"	5.31"	58WB
5.84"	5.53"	62N
6.22"	5.84"	72N
6.88	6.50"	85WB
8.50"	8.13"	82N
8.63"	8.25"	92N

4 Front Axles

Front Non-Drive Steer Axles

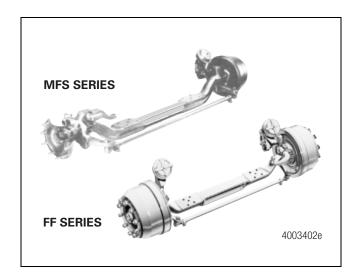

Identification


The axle build information and assembly date for Meritor front non-drive steer axles is on the axle identification tag.

The identification tag is fastened to the center of the beam at the front surface. The axle assembly date is located in either the lower right-hand or left-hand corner of the tag.


The Julian method is used to indicate the axle assembly date. The first two digits indicate the year, and the last three digits indicate the day of the year.


In the following example, 01 is the year 2001 and 327 refers to November 22.

To identify the model number, refer to the identification plate on the front of the beam. Use the complete model number to obtain parts.

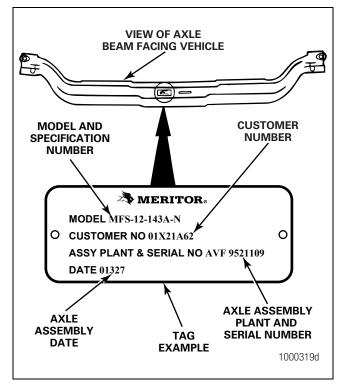


Front Non-Drive Steer Axles

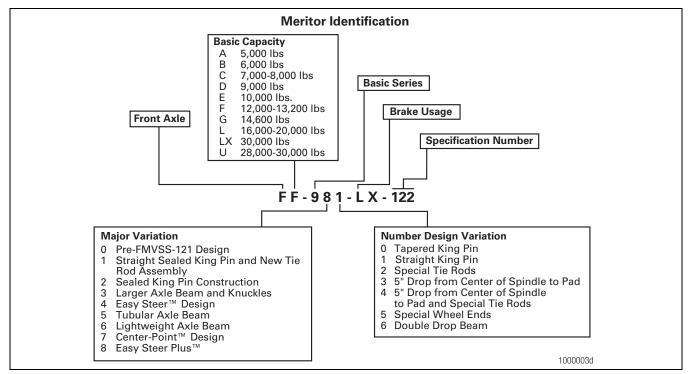

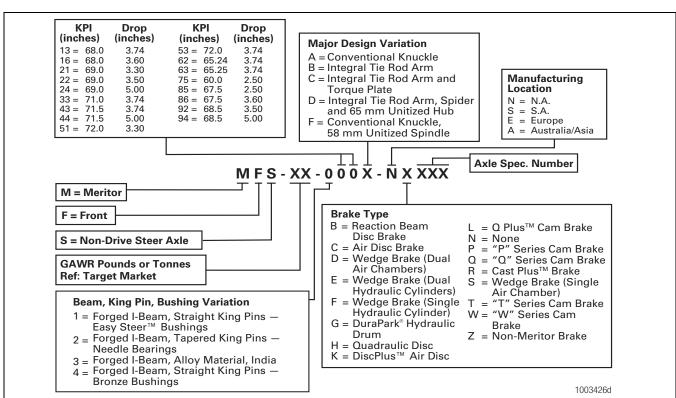

4 Front Axles


Front Drive Steer Axles

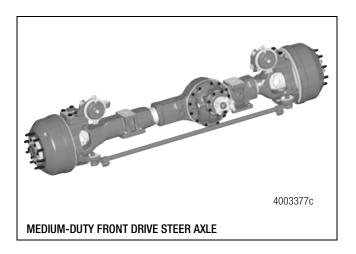

Identification


The axle build information and assembly date for Meritor front drive steer axles are on the axle identification tag. The identification tag is fastened to the front side of the axle housing.



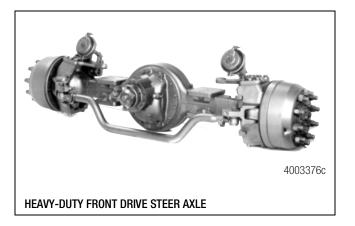

Model Nomenclature


Meritor heavy-duty front drive steer axle models manufactured before 1989 were identified as shown in the figure below.



Front Drive Steer Axles

Medium-duty front drive steer axle models are identified by a letter and number system. The letters and numbers give important information about the specific axle model.

The first seven positions of the designations identify a basic axle model. The second group of letters and numbers identify particular specifications.

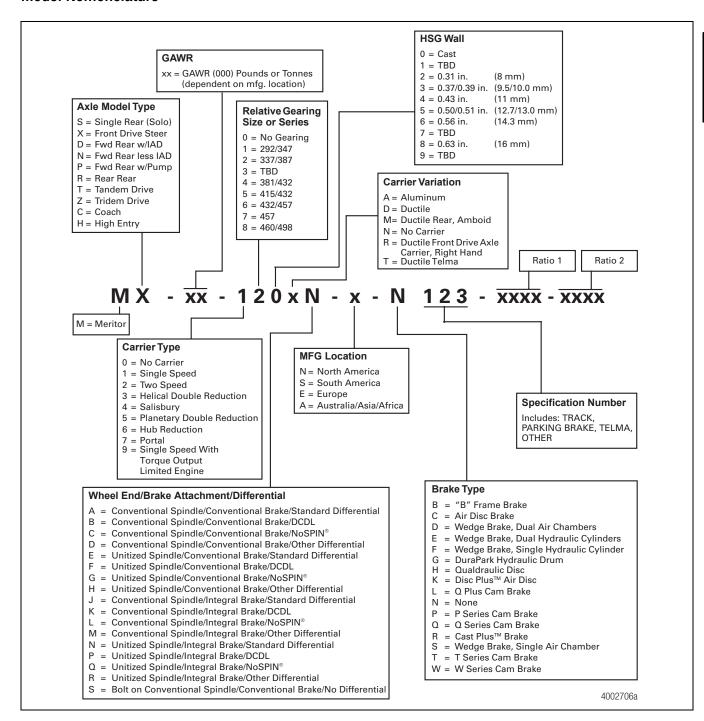


4 Front Axles


Front Drive Steer Axles

Current heavy-duty front drive steer axle models are identified by a letter and number system. The letters and numbers give important information about the specific axle model.

The first seven positions of the designations identify a basic axle model. The second group of letters and numbers identify particular specifications.

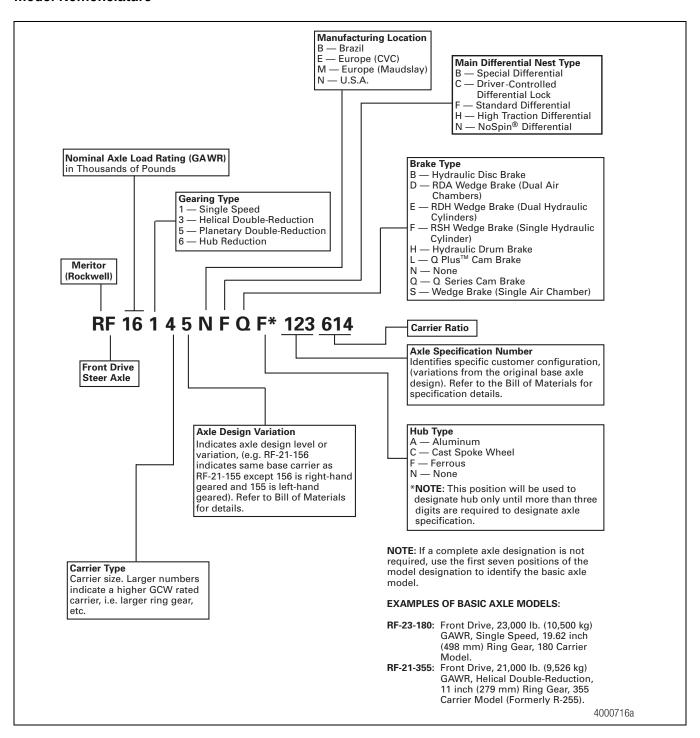



Single, Tandem and Tridem Rear Drive Axles

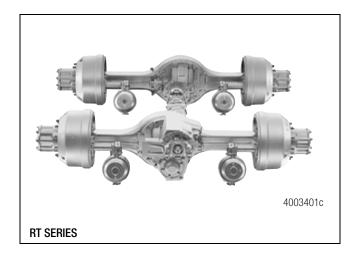


Identification

An identification tag is riveted on the axle housing or on the differential carrier. Use the model number and the ratio number marked on the identification tag and the number on the carrier to order replacement parts

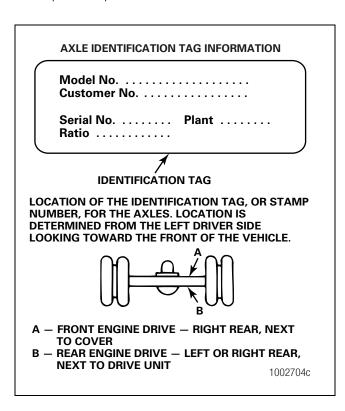


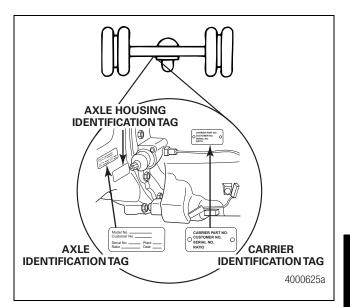


Single, Tandem and Tridem Rear Drive Axles

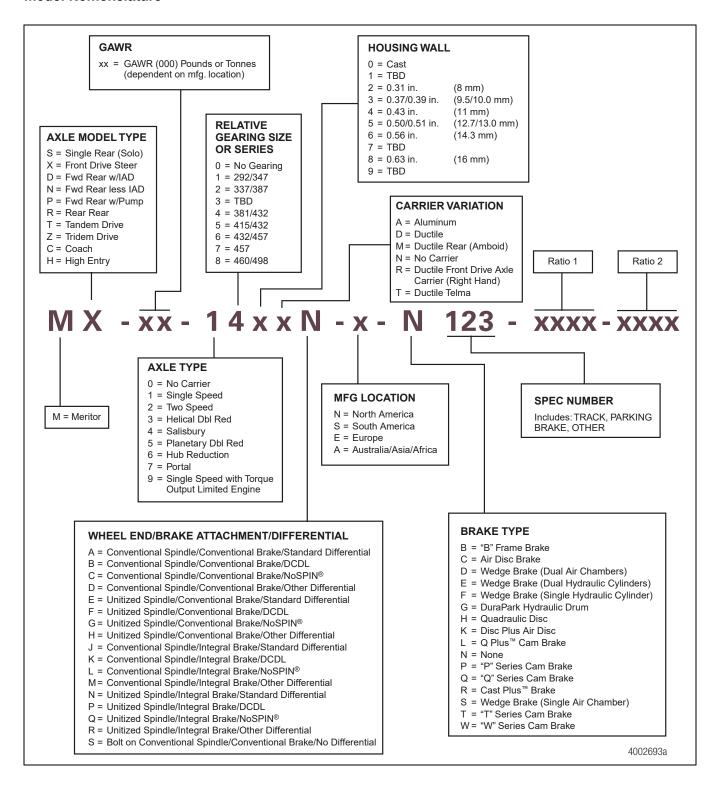

Single, Tandem and Tridem Rear Drive Axles

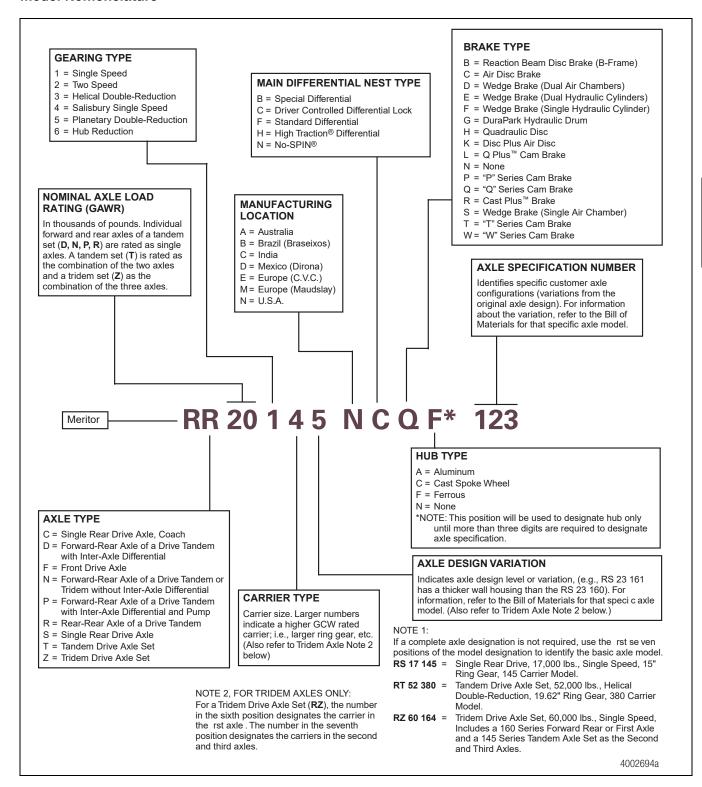



Bus and Coach Non-Drive Axles

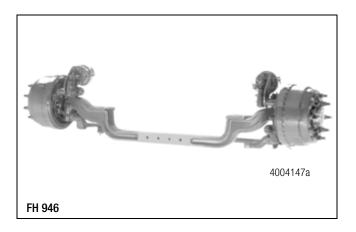


Identification

The front axle identification plate is located on the axle center.

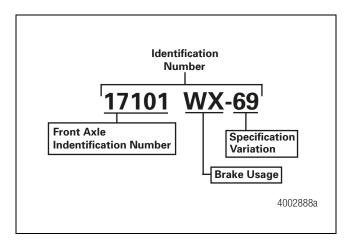





Bus and Coach Drive Axles

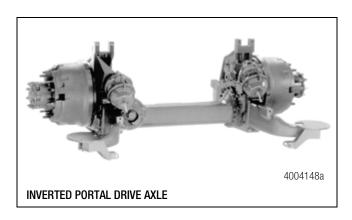


Identification


An identification tag is located on the axle housing or differential carrier.

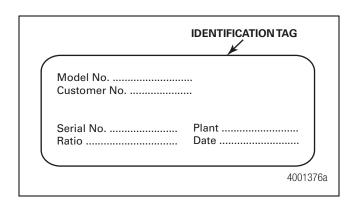

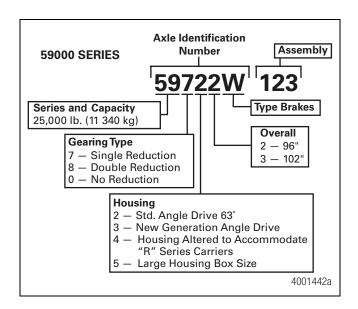




Bus and Coach Drive Axles

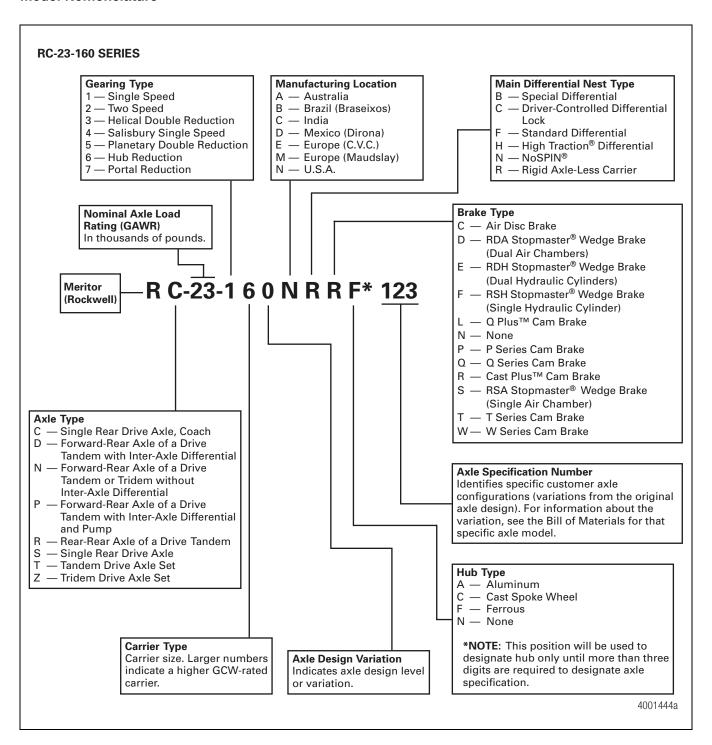


RideStar™ RHP

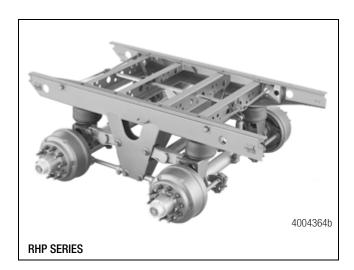


Identification

The identification tag is located on the roadside of the suspension near the pin release handle.

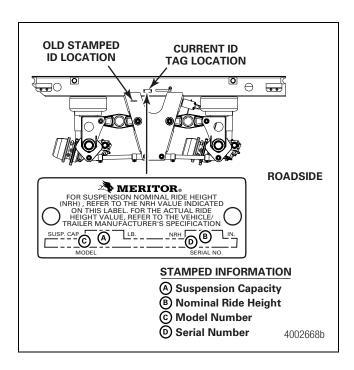


Model Nomenclature

The model number on the identification tag provides suspension and axle information.




RideStar™ RFS Series

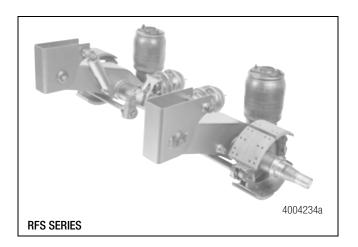



Identification

An identification tag is located on the rear of the roadside trailing arm.

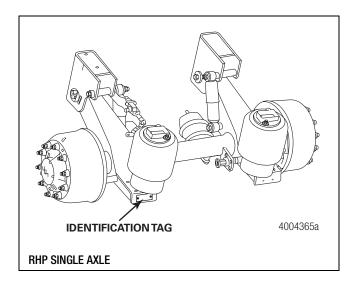

RideStar™ RFS Series

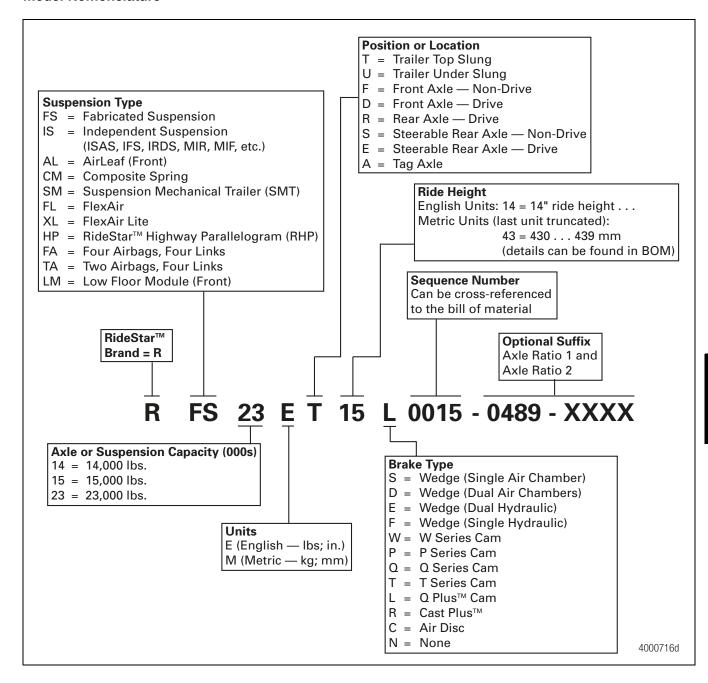

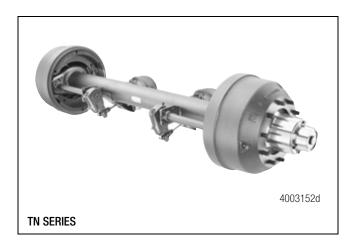


Identification


All of the information necessary to identify a particular trailer axle is indicated on the trailer axle identification tag. Located at the center of the axle beam, this ID tag is stamped with the axle model number, serial number and date of manufacture.

The model number is composed of letters and digits, for example, TN-4670-Q-2020. This number is used to identify the axle assembly when ordering replacement parts.

The serial number is composed of letters and digits, for example, KNA-38050685. This number can be used to identify a particular trailer axle, and the material and components used to build the axle.


The date of manufacture is indicated by a Julian date, for example, 27693. The first three digits (276) indicate the 276th day of the year, or October 3. The last two digits (93) indicate the year, or 1993.

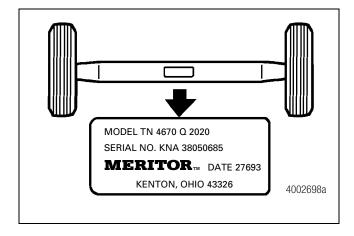

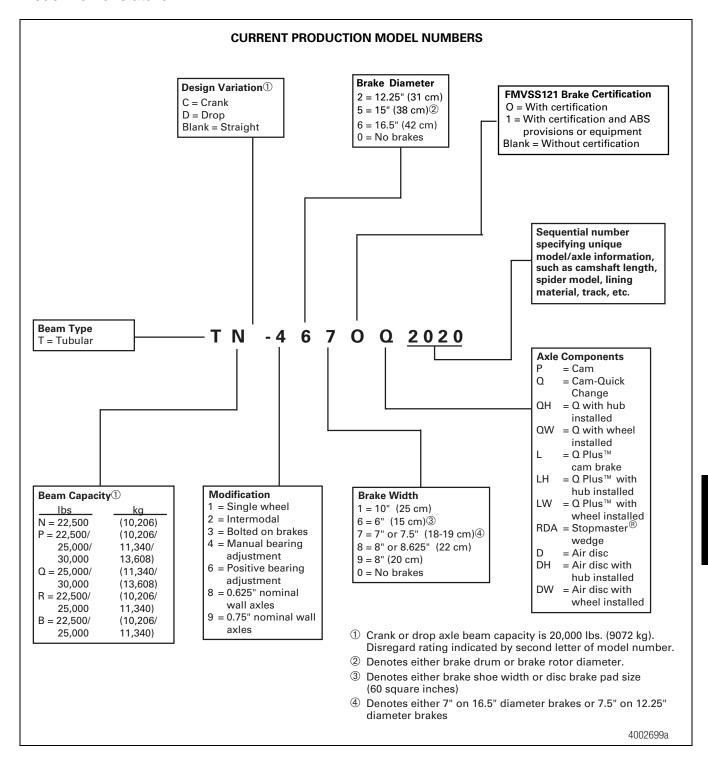


9 Transmissions

FreedomLine®

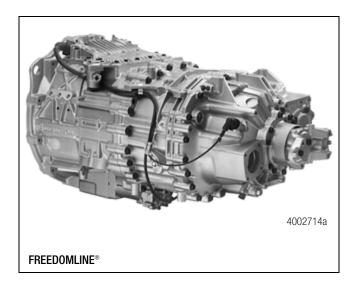



Identification

An identification plate is installed on the left side of the FreedomLine® transmissions.

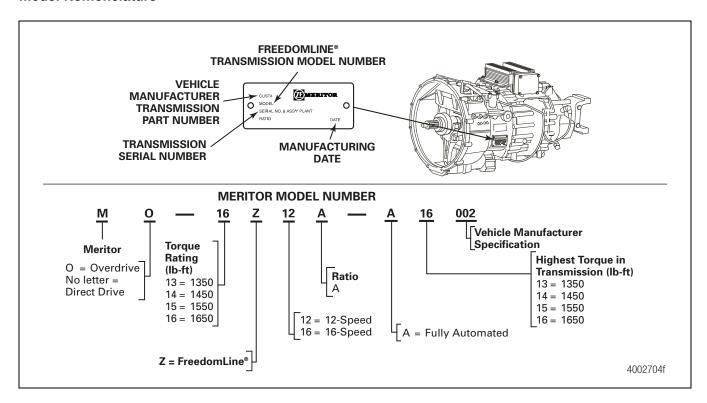


Platform "G"

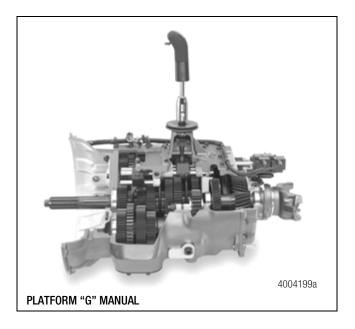




Identification

An identification plate is installed on the right side of the platform "G" transmissions.

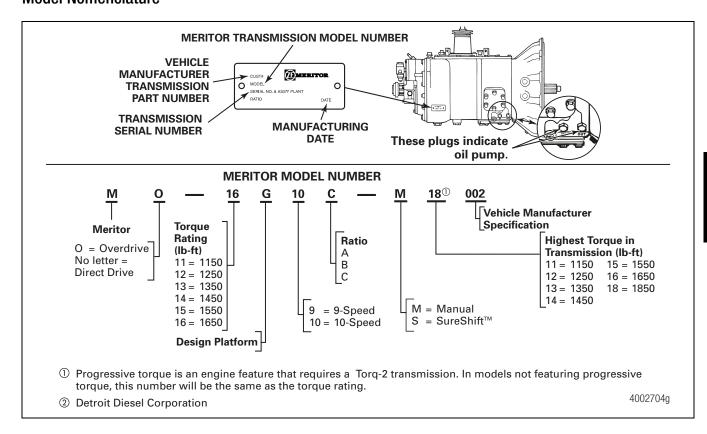



10 Transfer Cases

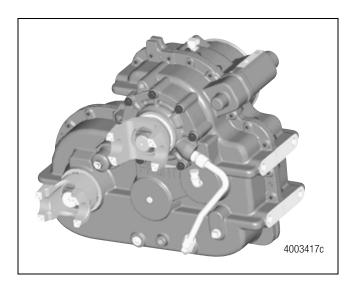


Identification

An identification tag is located on the front cover.

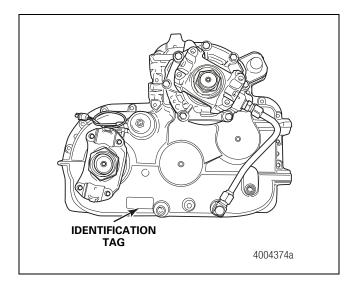

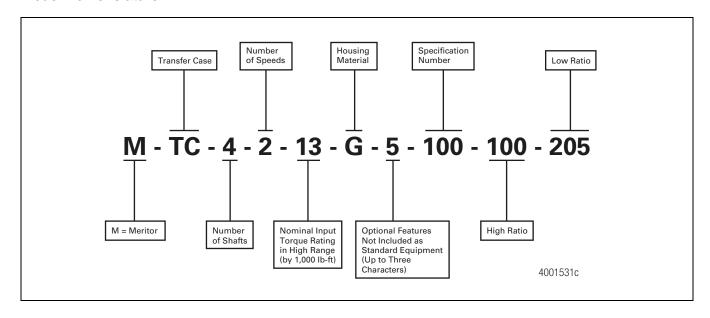

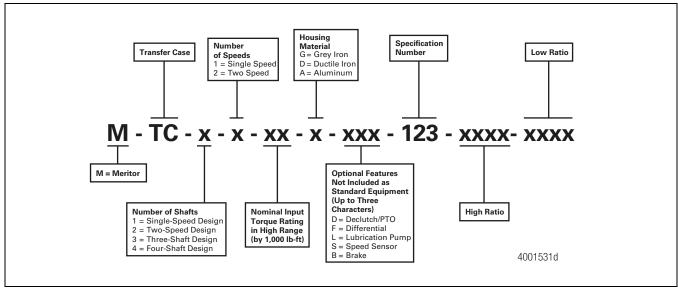

11 Meritor WABCO Components

NOTE: For a complete listing of all Meritor WABCO systems and components, including Roll Stability Control (RSC) for trucks and tractors and Roll Stability Support (RSS) for trailers, please visit the website at www.meritorwabco.com

Enhanced Easy-Stop™ Trailer ABS

The Meritor WABCO Easy-Stop™ Trailer ABS is an electronic, self-monitoring system that works with standard air brakes.


NOTE: S = Sensors

M = Modulator Valves

There is a specific ECU/valve assembly for each Easy-Stop™ Trailer ABS configuration.

- For 2S/1M Basic, the assembly consists of an ECU and a single modulator valve assembly.
- For 2S/2M Standard and 2S/2M, 4S/2M and 4S/3M Premium, the assembly consists of an ECU and a dual modulator valve assembly. The valve portion of the ECU/dual modulator valve assembly contains two separate modulator valves that share common control and exhaust ports. The 2S/2M Standard valve has only two sensor outlets and cannot be upgraded.

For Standard and Premium assemblies, the ECU and modulator valve may be individually replaced.

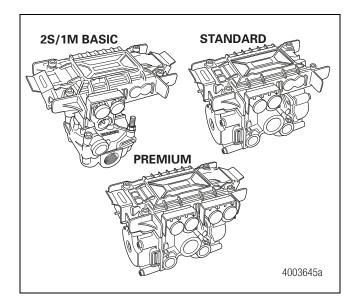


A 4S/3M configuration consists of an ECU/dual modulator valve assembly and one external ABS modulator valve.


Identification

To identify Enhanced Easy-Stop™, check the identification tag on the Electronic Control Unit (ECU). The part numbers for Enhanced Easy-Stop™ systems are shown below.

- 400 500 101 0 (2S/1M Basic for standard trailers)
- 400 500 104 0 (2S/1M Basic for dollies and steerables)
- 400 500 102 0 (2S/2M Standard)
- 400 500 103 0 (2S/2M, 4S/2M and 4S/3M Premium)

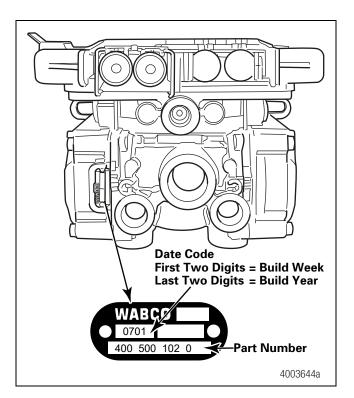


External Modulator Valve

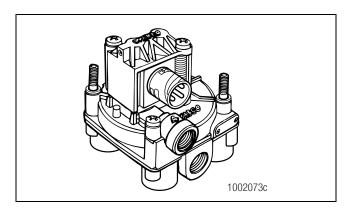


Meritor WABCO

Sensor with Molded Socket

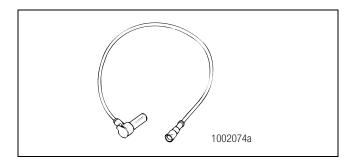


In-Line Filter Valve


Removes most contaminate particles from the trailer air brake system. Approved for use on all trailer applications for both control and supply lines.

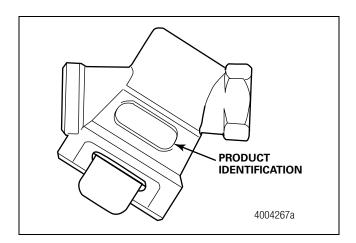

PLC DataMaster™ Trailer Data Extraction Module

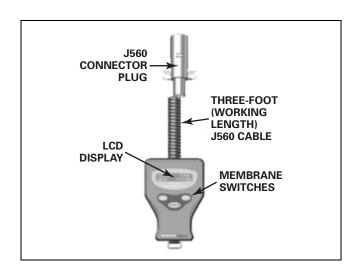


Reverse Detection Module



Hydraulic Anti-Lock Braking Systems (ABS)

Meritor WABCO Hydraulic ABS is an electronic wheel-speed monitoring and control system used on medium-duty trucks, buses and motor home chassis equipped with a hydraulic brake system.


There are two systems available, C and D version hydraulic ABS. D version ECUs are available in both cab- and frame-mounted versions.




11 Meritor WABCO Components

Identification


The hydraulic ABS version installed on the vehicle may be determined by looking at the ECU. The C version system ECUs are larger than the D version ECUs. If the ECU is easily visible, look at the part number identification tag. The D version ECUs will have a D designation printed on the tag. There is no letter designation on C version ECUs.

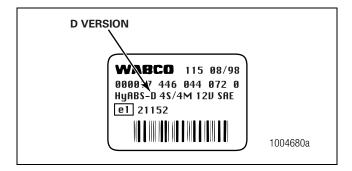

Modulator Assembly

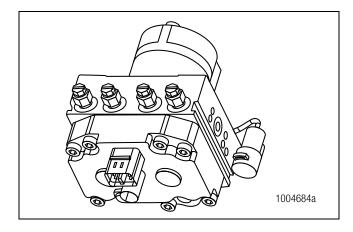


Sensor with Molded Socket

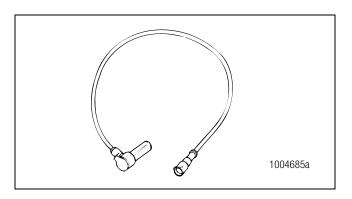


Pneumatic ABS for Trucks, Tractors and Buses

Meritor WABCO pneumatic ABS is an electronic system that monitors and controls wheel speed during braking for trucks, tractors and buses. The system works with standard air brake systems. Pneumatic ABS ECUs are available for cab- or frame-mounted applications. Basic and universal ECUs are cab-mounted.




Identification

The ABS version is marked on the ECU.

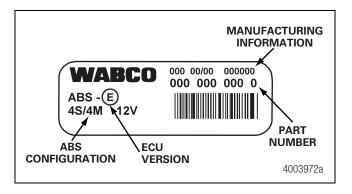


ABS Valve Package — Rear Axle

The valve package provides an alternative to separate valve installation by combining a service brake relay valve with two ABS modulator valves.

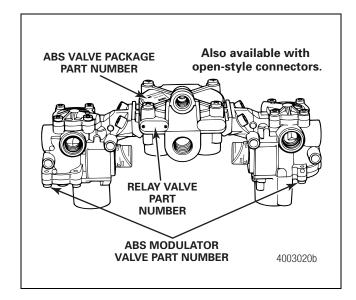


ABS/ATC Valve Package — Rear Axle

The valve package provides an alternative to separate valve installation by combining a service brake relay valve with two ABS modulator valves and one ATC valve.

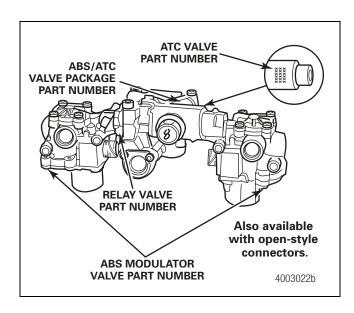


ABS Valve Package — Front Axle


The valve package provides an alternative to separate valve installation by combining a quick release valve with two ABS modulator valves.

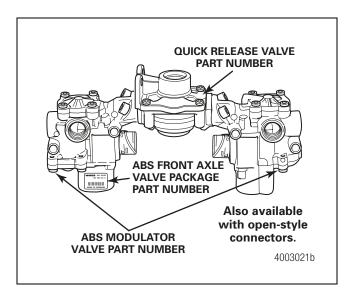


ABS Modulator Valve

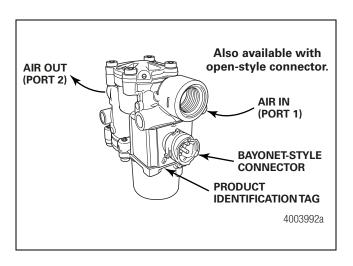


Automatic Traction Control Valve

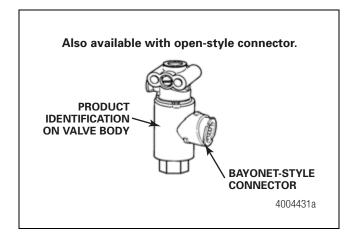

Straight Sensor

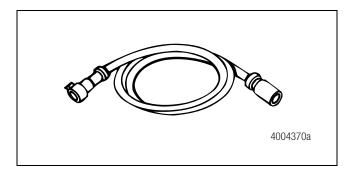

Right Angle (90°) Sensor

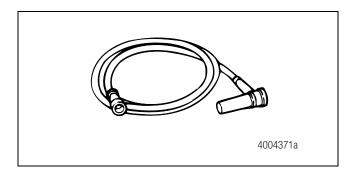

Air Dryers

Identification



Alphabetical designations of the System Saver Series family of air dryers have specific meanings.

- P indicates an external purge tank is used for desiccant regeneration
- U indicates discharge line unloaded compressor
- E indicates a Holset-style compressor function
- G indicates integral governor for air compressor control
- UP indicates discharge line unloaded compressor (with external purge tank)

System Saver 1200/1800: System regeneration valve assembly on side of dryer

System Saver 1200E: Tubing and banjo fitting at front of dryer


System Saver 1200P/1800P: Uses dedicated purge tank. Port 22 drilled and tapped

System Saver 1200U/1800U: Small regeneration hole visible in back of Port 1 when fitting is removed. No spring in turbo cut-off valve assembly

System Saver 1200UP/1800UP: Port 22 drilled and tapped. Small regeneration hole is visible at back of Port 1 when fitting is removed. No spring in turbo cut-off valve assembly. Dedicated purge tank


-0

The air dryer base is the same for both the 1200 and 1800 Series air dryers; however, the 1800 Series canister is 3.2-inches taller than the 1200. This larger canister contains 50% more desiccant, which makes the 1800 ideal for applications calling for frequent starts, stops and long compressor cycles.

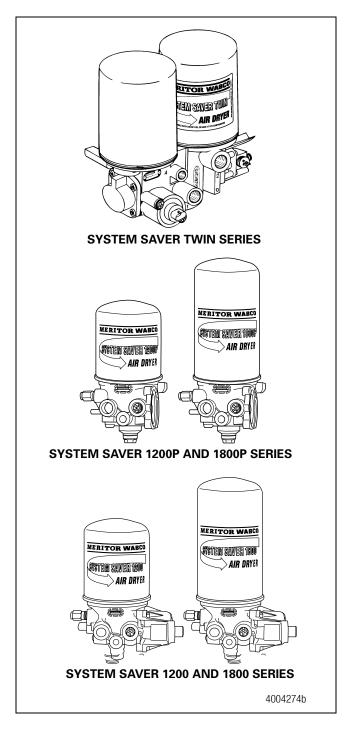

Air Compressors


The Meritor WABCO System Saver 318 air compressor provides and maintains air under pressure to operate devices in the air brake and auxiliary air systems of a vehicle. It consists of two major subassemblies: Cylinder head and crankcase/cylinder block. The System Saver 318 air compressor is used on Mack engines and is available in non-through drive and through drive versions. The through drive version is required to run hydraulic power steering pumps.




11 Meritor WABCO Components

Air Brake System Valves

Meritor WABCO provides a complete line of air brake valves. Please visit the website at www.meritorwabco.com for complete information.

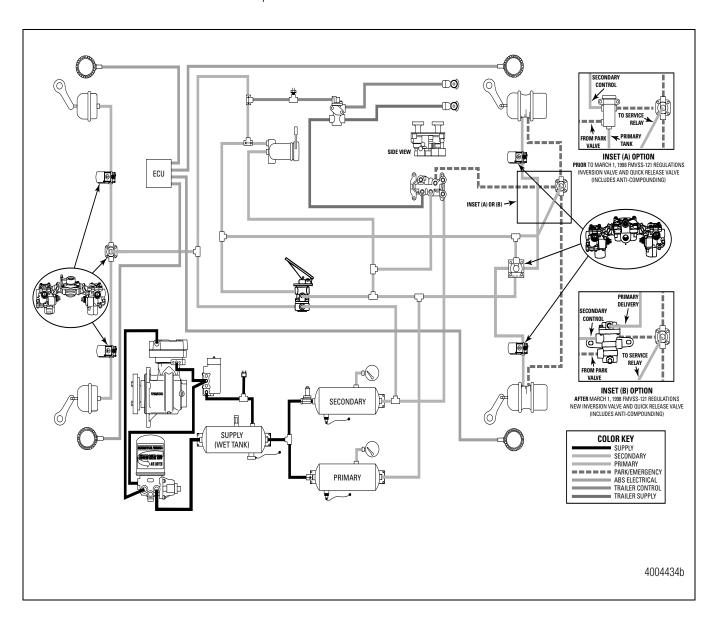



Single or Dual Circuit Foot Valve and Pedal

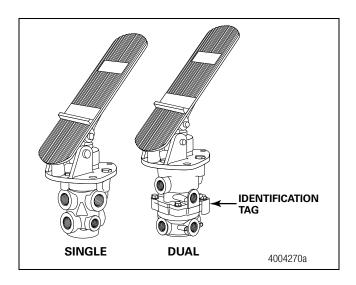


Hand-Operated Valves


Trailer Brake Control Valves






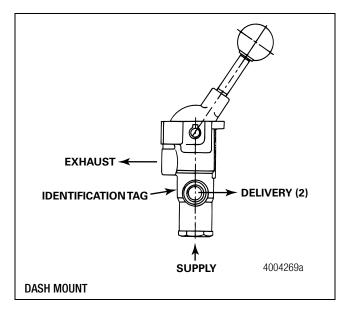


Park Brake Valve




IR2 Valve



Leveling Valves

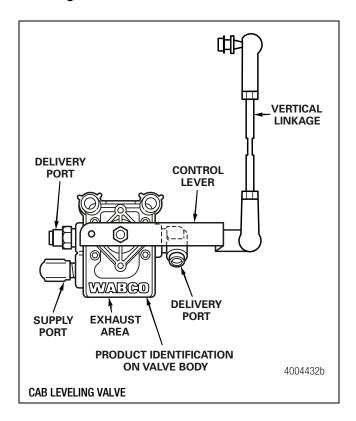

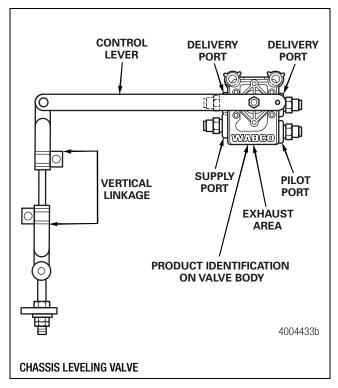

Identification

Shock absorbers are identified by the following.

- The Gabriel logo, older products do not have the Gabriel stamp
- The country of origin, either Canada or South Africa
- A date code

